

Sound Dampening Wall Panel Instructions Cut Line

Material: 105gsm double side art paper(C25).

Color: Black + pantone cool gray 8c

Surface coating : glossy varnish.

6.25 INCHES


ATRIX HEXAGON ACOUSTIC PANELS USER GUIDE

What's Included


- Sound Dampening Wall Panels
- Adhesive Velcro Wall Strips

Setting Up the Wall Panels


- **Step 1** - Ensure the mounting surface is clean, smooth, and free of any loose debris or dust.

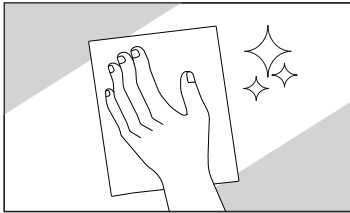


- **Step 2** - Attach 3 Velcro strips to the back of the sound dampening wall panel.

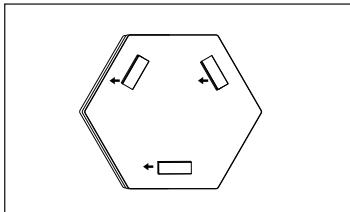

- **Step 3** - Remove the double sided adhesive backing on the Velcro strips.

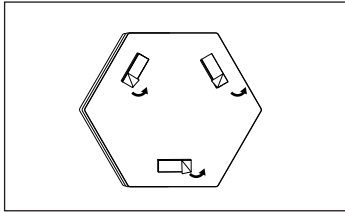


- **Step 4** - Firmly press the wall panel to the wall, pressing where the straps are located, until it is fully fixed.

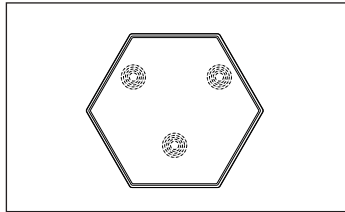

Removing the Wall Panels

- **Step 1** - Remove the panel, and pull the adhesive strips up from the corner.

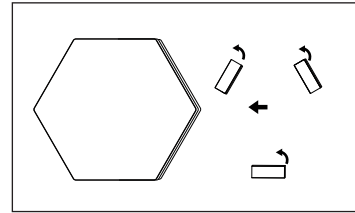

- **Note:** The adhesive tape may leave residue on the wall, it should wipe away with no issues. They also may remove pigment from certain paints. The adhesive tape is suitable for wall tiles, painted wood, metal, or smooth surfaces.

Need Help?

Have any questions or comments? Need help getting set up?
Contact us at <https://care.gamestop.com>

ATRIX, Geeknet, Inc. 625 Westport Pkwy, Grapevine, TX 76051 Phone: 855-474-7717

4.5 INCHES

FRONT