
ATRIX. ? GUILD KEYBOARD USER GUIDE

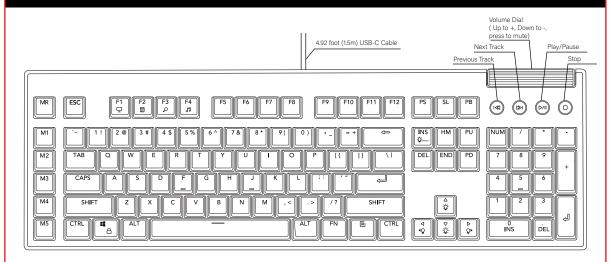

What's Included

· RGB Guild Gaming Keyboard

Need Help?

Have any questions or comments? Need help getting set up? Contact us at https://care.gamestop.com

Light Function Keys

- FN Key + INS Cycle 14 preset keyboard light settings
- FN Key + DEL Cycle 9 solid color light settings
- FN Key + PB Reset keyboard light settings
- FN Key + ESC Reset to factory settings
- FN Key + WIN + L Lock/Unlock Windows Key
- FN Key + Up Arrow Increase Brightness
- FN Key + Down Arrow Decrease Brightness
- FN Key + Left Arrow Decrease LED Speed • FN Key + Right Arrow - Increase LED Speed

Custom Light Settings

- To set custom light settings press FN+1 at the same time followed by FN+HM to start recording.
- · Select the keys that you want to be active in this light mode.
- · Press FN+HM to finish recording.
- · There are 5 custom light settings. To record another press
- FN+2, FN+3, FN+4, or FN+5 and follow the steps above.
- · To activate press the FN+the desired light setting.

Keyboard Multimedia Keys

- FN Key + F1 Computer
- FN Key + F2 Calculator
- FN Kev + F3 Search
- · FN Key + F4 Media Player

Recording Macros

RGB Guild Gaming Keyboard has dedicated M1-M5 macro keys. Those keys can be assigned to perform certain single or multi-key press actions for quick access during the game or everyday computing.

To record a macro

- · Press the MR key. The macro status LED indicator will start blinking to indicate macro recording mode is now on.
- . Select the M-key you want the macro assigned to. The macro status LED indicator will start blinking rapidly to indicate macro recording is now in progress.
- · Every key press will now be recorded.
- · Press MR key to stop recording. The macro status LED indicator will stop blinking and turn off.

To execute a macro

· Press any M1-M5 key to play previously recorded macro.

Macro Key Functions

Press and hold the MR key for 5-6 seconds to enter the macro key function mode. The macro status LED indicator will turn solid white to confirm the new mode of operation. While in this mode, you have access to three macro key functions.

Enabling, disabling, and removing macros

Once you're in this mode, press one of the M1-M5 macro keys to check the respective macro's status. A rapidly blinking LED light will indicate the macro's status:

- · One blink to confirm that the M key is enabled,
- . Two blinks to confirm that the M key is disabled. All of the M1-M5 macro keys are enabled by default. You can keep pressing the M key to enable or disable the macro; the LED light will always reflect the macro's current status.

To disable any M1-M5 macro key

 Press any M1-M5 key to disable the macro key without deleting the action previously assigned. The macro status LED indicator will blink rapidly twice to confirm the selected

key is now disabled.

To enable any M1-M5 macro key

· Press any M1-M5 key again to enable the macro key. The macro status LED indicator will blink rapidly once to confirm the selected key is now disabled.

To delete macro assigned to M1-M5 macro key

· Press and hold any M1-M5 key for 3 seconds to delete macro previously assigned to the key. The macro status LED indicator will blink rapidly three times to confirm macro has been deleted.

To exit macro key functions mode, press and hold MR key for 5 seconds. The macro status LED indicator will turn off to

Important Safety Instructions

Liquid has penetrated into the equipment. - Equipment has been exposed to humidity.
 Equipment has been dropped and/or is damaged. - Equipment has obvious sign of breakage.
 Equipment does not work well or you cannot get it working according to user's manual.

Warning: Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

the nathuctions, may cause harmful interference to radio communications. However, there is no quantities that interference will not occur in particular installation. If this equipment does cause harmful interference to radio or television neception, which can be determined by turning the exportent of and on the user is encouraged to the toront the interference by one or more of the following measures:

- Recented no robotion the receiving atternet.

- Recented no robotion the receiving atternet.

- Connect the separation between the equipment and escories.

- Connect and application of the control of the control of the receiver is connected.



ATRIX. Geeknet. Inc. 625 Westport Pkwv. Grapevine. TX 76051 Phone: 855-474-771

6.75 INCHES