














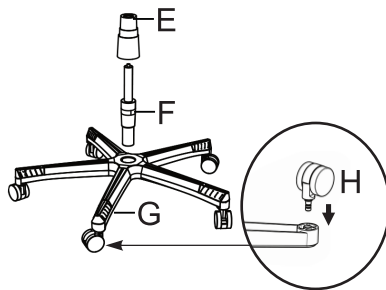


ATRIX™ ASSEMBLY INSTRUCTIONS


Part Lists:

- Do not discard packaging until you have confirmed all components are present and in good condition. Refer to diagram below.
- To prevent damage, assemble chair on soft surface such as carpet or cloth.


PARTS	DESCRIPTION	SKETCH	QTY
A	Back		1
B	Seat Cushion		1
C R	Right Armrest (R)		1
C L	Left Armrest (L)		1
D	Butterfly Plate		1
E	Cover		1
F	Gas Lift		1
G	Base		1
H	Caster		5
I	Screw - M6 - 18mm		2
J	Screw - M8S - 28mm		10 (+1 extra)
K	Screw - M8L - 33mm		4 (+1 extra)
L	Side Cover(L/R)		2
M	Hex Wrench-M6		1
N	Hex Wrench-M8		1
O	Plastic Caps		4



Step 1
Place Base(G) upside down on floor and insert Casters(H) into Base(G). Turn upright, then insert Gas Lift(F) into center hole on Base(G). Place Cover(E) over Gas Lift(F).

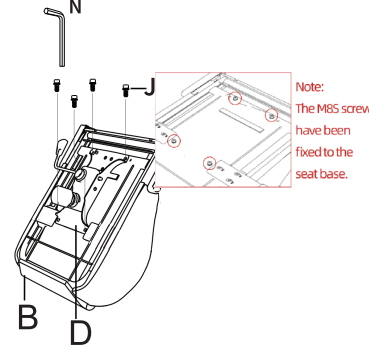

Step 2
Disassemble the Screw-M8S from the Seat Cushion(B) first.
And then, use these Screw - M8S to assemble Butterfly Plate(D) on Seat Cushion(B) by Hex wrench - M8(N).

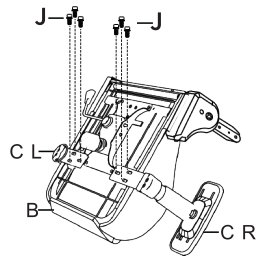

Step 3
Disassemble the Screw-M8S from the Seat Cushion(B) first.
Use Screw - M8S(J) to attach Left Armrest(CL) by Hex wrench - M8(N) to Seat Cushion(B) .
The same as Right Armrest (CR).

ATRIX™ ASSEMBLY INSTRUCTIONS



Part Lists:

- Do not discard packaging until you have confirmed all components are present and in good condition. Refer to diagram below.
- To prevent damage, assemble chair on soft surface such as carpet or cloth.

Step 4



Disassemble the Screw-M8L(K) and Screw-M6(I) from the Recliner Assy first.

Use Screw-M8L(K) to attach Seat Cushion (B) to Back (A) by Hex wrench-M8(N). Then use side cover(L) to cover screw holes, use Screw-M6(I) to fix the side cover(L) by Hex wrench-M6(M). At last, use plastic cap(O) to cover screw holes.

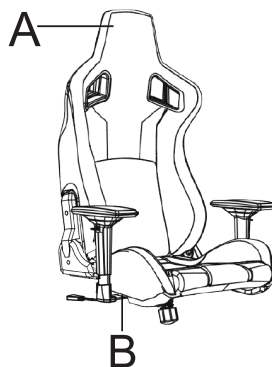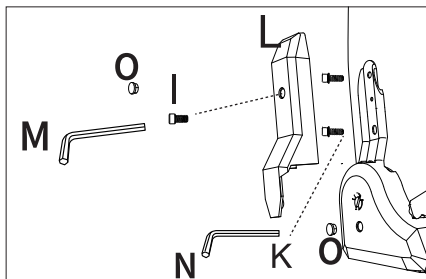

Step 5

Place the seat assembly on Gas Lift(F) and press down until fully engaged.

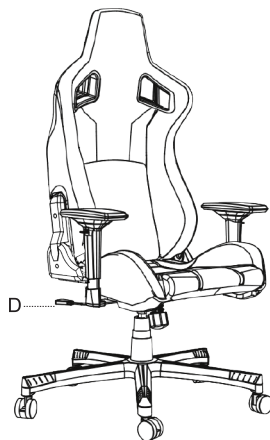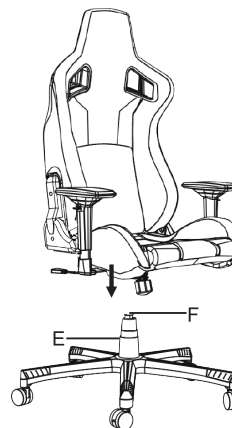

Step 6

To adjust seat height – while seated, lean forward and reach under the right side of the seat to find the adjustment handle (D).

To Raise:

Lift the handle and raise your body up slightly to allow the seat to rise to the desired height.

To Lower:

Lift the handle while applying body weight downward on seat. The seat will descend until the handle is released or the seat reaches the bottom position.

Step 7

Turn the Recline Assy to adjust the angle of the chair back gradually and gently.

Pull and push the handle of Butterfly Plate(D) to open and close the rocking model.

